



Data sheet 100C411-54

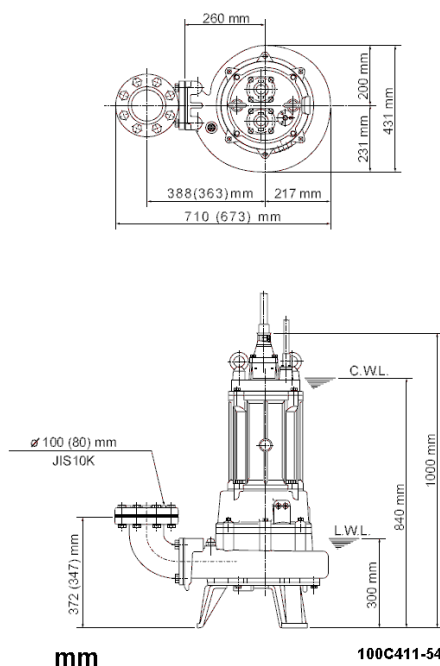

CWL: Continuous running water level
LWL: Lowest running water level

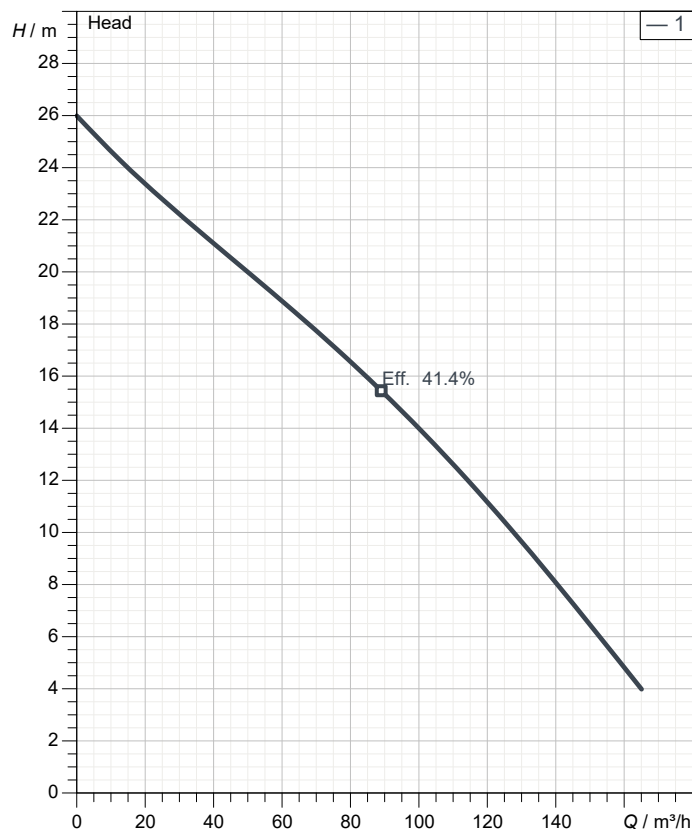

Specification

Electric submersible pump C-series
Degree of protection IP 68
Pressure resistance max. 20 m
Type of impeller single channel impeller
Free passage 50 mm
Suitable for:
sewage water and liquids carrying solids

Electric motor

Dry-type submersible induction motor
Insulation class F 4 Poles 1455 1/min
Starting mode Star-delta
Rated voltage 400 V 50 Hz 3~
Power uptake 14.30 kW
Rated power 11.00 kW
Rated current 23.4 A
Start current 147.0 A

Cable

10m NSSHÖU 4Cx2,5mm²/NSSHÖU 3Cx2,5mm²/2PNCT 2Cx1,25mm²

Motor Protection

Miniature protector in windings
(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device
Primary seal
Silicon carbide on silicon carbide
Secondary seal
Silicon carbide on silicon carbide

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller
FC20 (EN-GJL-200) + Tungsten carbide
Pump casing
FC200 (EN-GJL-200)
Suction cover
FCD700 (EN-GJS-700-2)
Motor Frame
FC200 (EN-GJL-200)
Shaft
SUS403 (EN-X6Cr13)

Discharge size

4" (100mm) JIS 10K screwed-in mating flange
guide rail fitting optional


Weight

179 kg (dry weight of the pump only without cable)

Performance curve



100C411-54

Discharge port	4"
Head	26.0 m
Flow	165.1 m³/h
Rated power	11.00 kW
Power input	14.30 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	23.4 A
Starting current	146.95 A
Number of poles	4
Speed	1455 1/min
Starting mode	Star-delta
Insulation class	F

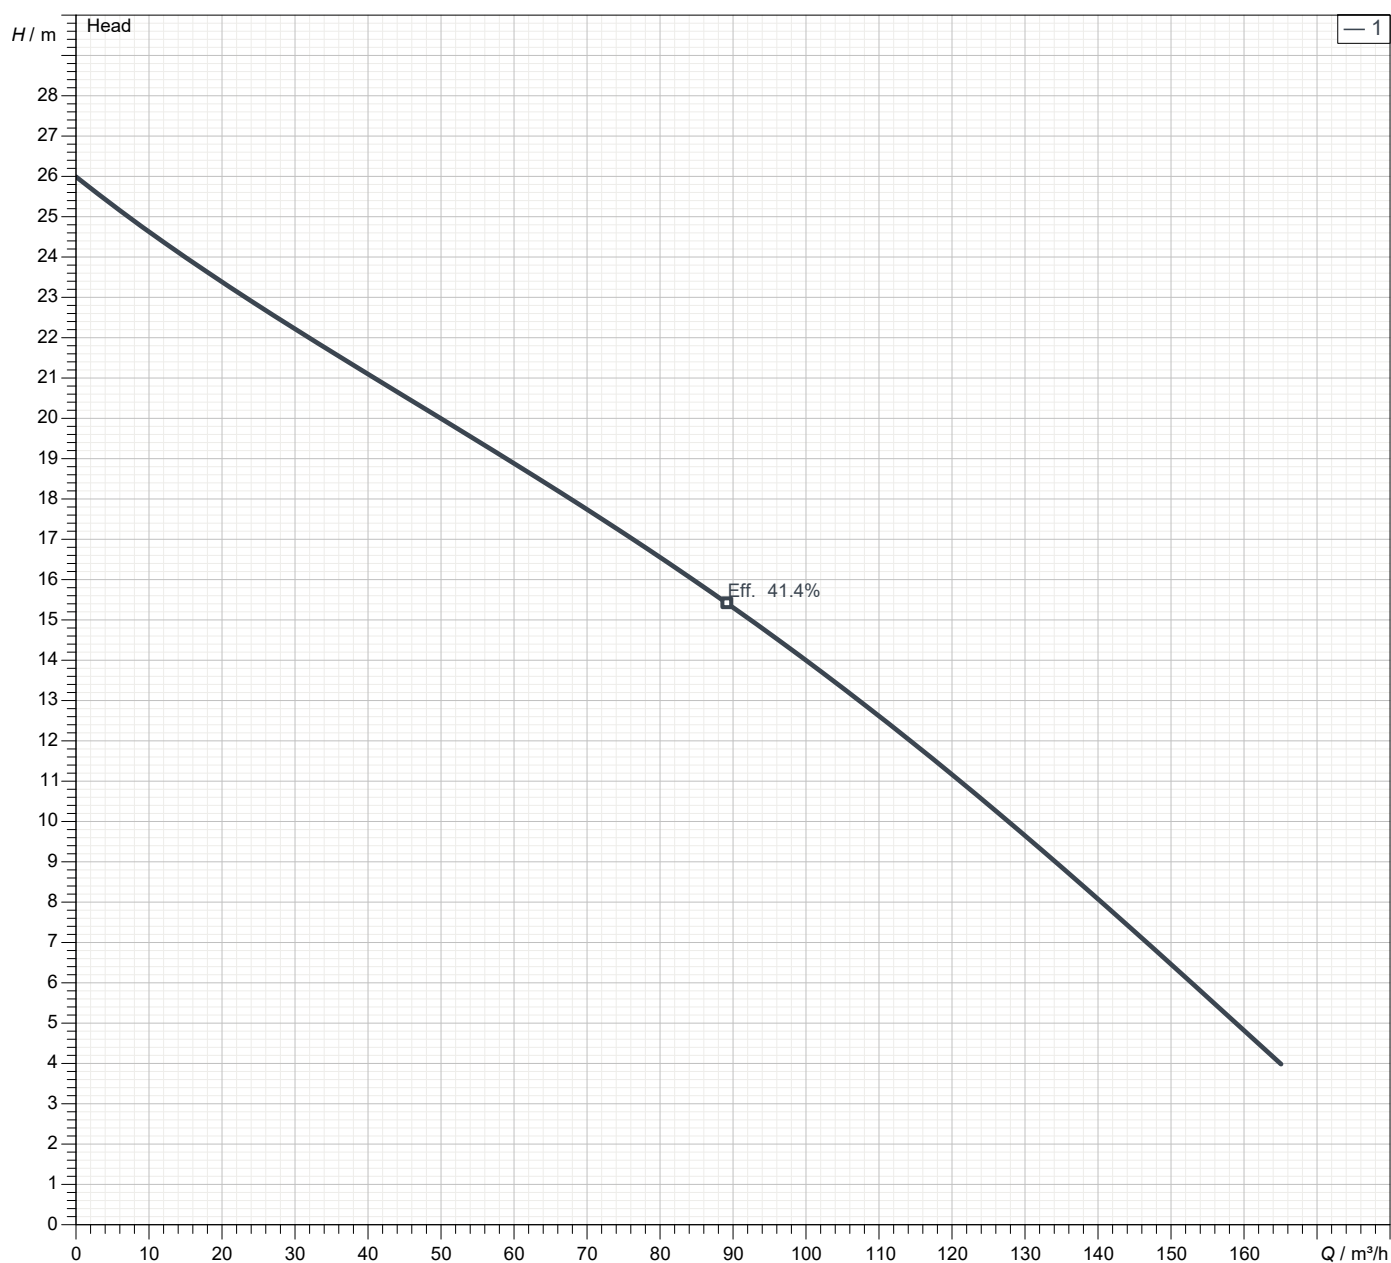

Dimensions

100C411-54

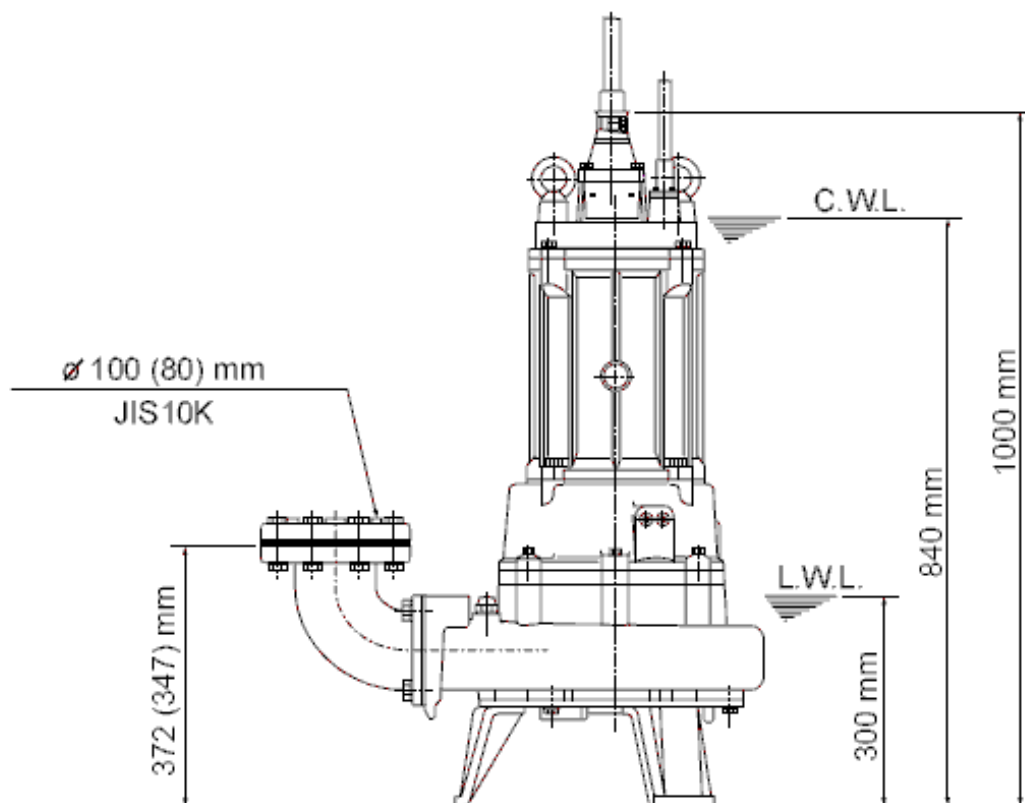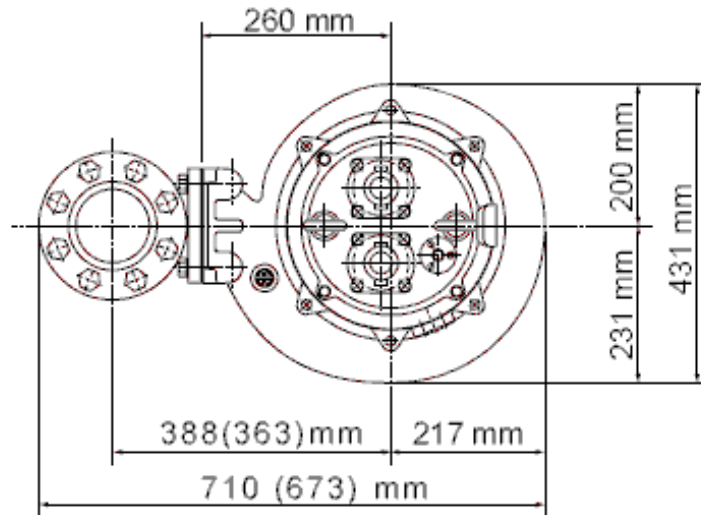


mm

100C411-54

CWL: Continuous running water level
LWL: Lowest running water level

Sectional drawing

100C411-54

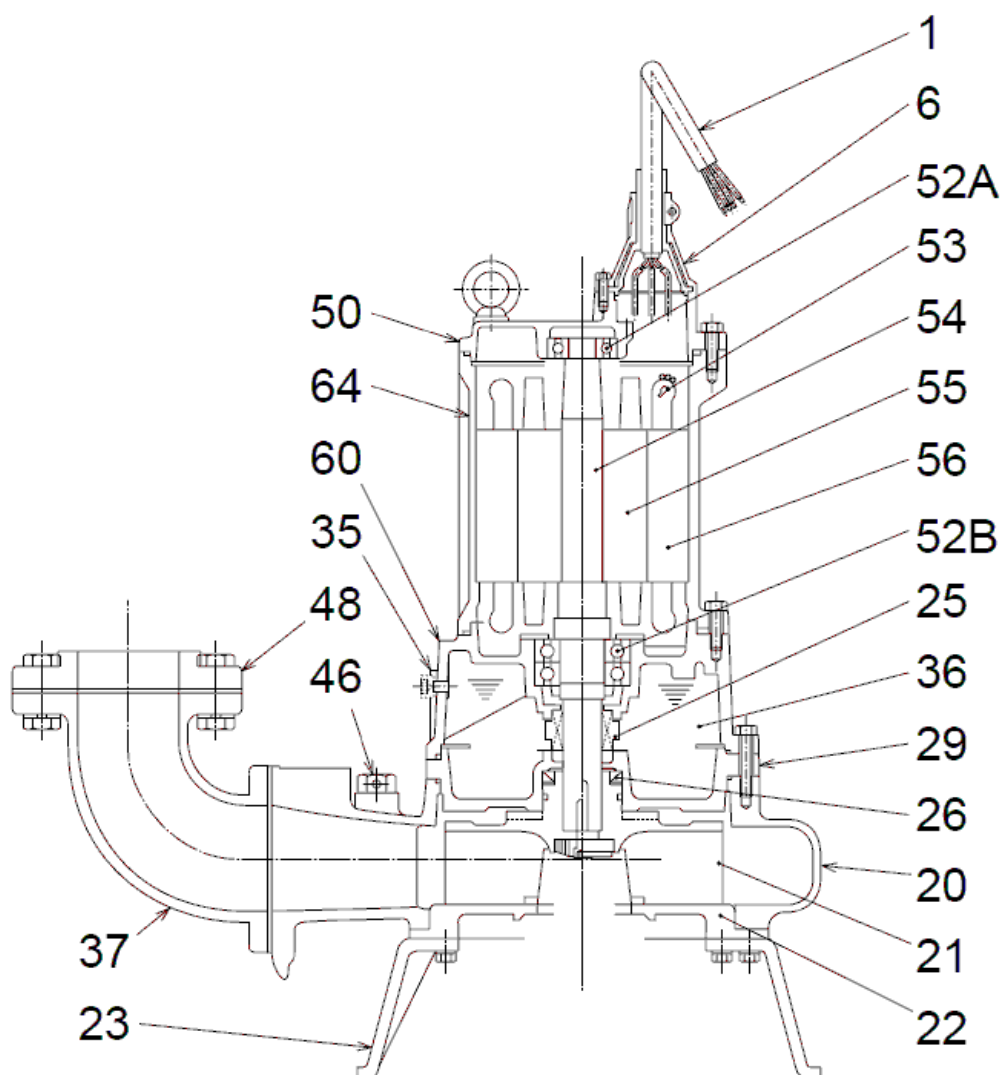

100C411-54

No.	Description	Remark	No.	Description	Remark
1	Cable (3x)	NSSHÖU	52B	Lower Bearing	6310ZZD2C3
6	Stuffing box	FC200 (EN-GJL-200)	53	Motor Protector 380/400/415V-50Hz	KA314-HRXL00 (H.C)
20	Pump casing	FC200 (EN-GJL-200)	54	Shaft	SUS403 (EN-X6Cr13)
21	Impeller	FC20 (EN-GJL-200) + Tungsten carbide	55	Rotor	.
22	Suction cover	FCD700 (EN-GJS-700-2)	56	Stator	.
23	Stand support (3x)	FC200 (EN-GJL-200)	60	Bearing Housing	FC200 (EN-GJL-200)
25	Mechanical seal	H-40X	64	Motor Frame	FC200 (EN-GJL-200)
26	Oil seal	TC709212	72	Eye screw (2x)	Construction steel SS400
29	Oil casing	FC200 (EN-GJL-200)			
35	Oil screw (2x)	SUS304 (EN-X5CrNi18-10)			
36	Lubricant	Turbine oil (ISO VG32)			
37	Discharge bend	FC200 (EN-GJL-200)			
46	Air vent screw	Nylon			
48	Screwed Flange	FC200 (EN-GJL-200)			
50	Motor cover	FC200 (EN-GJL-200)			
52A	Upper bearing	6306ZZC3			