



Data sheet 50PUA2.25-53

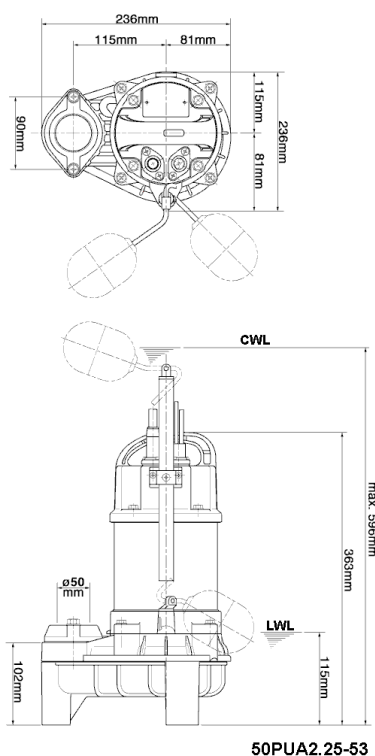

CWL: Continuous running water level
LWL: Lowest running water level

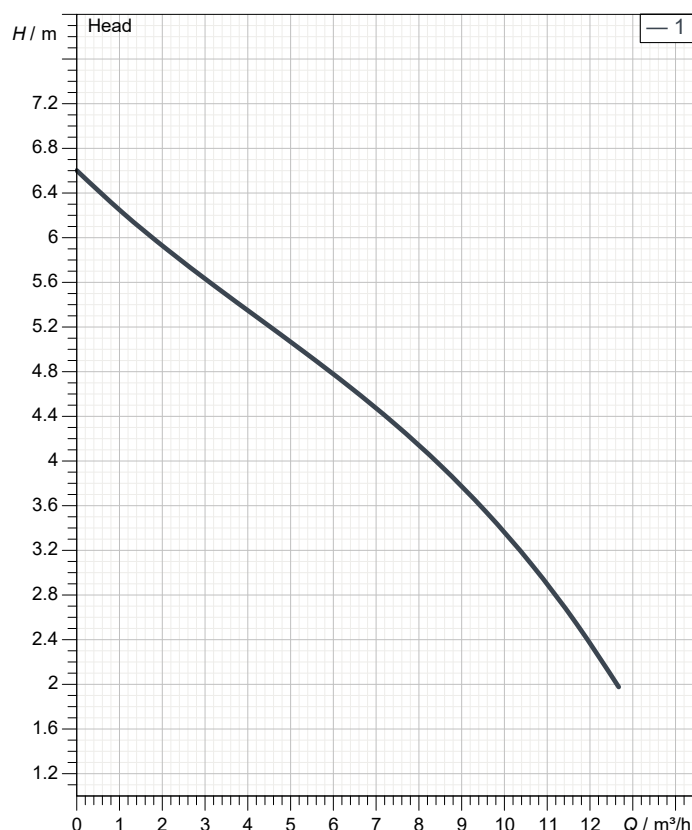

Specification

Electric submersible pump PU-series
Degree of protection IP 68
Pressure resistance max. 10 m
Type of impeller Vortex impeller
Free passage 35 mm
Suitable for:
sewage water, waste water, various waste water

Electric motor

Dry-type submersible induction motor
Insulation class E 2Poles 2827 1/min
Starting mode Direct starting
Rated voltage 400 V 50 Hz 3~
Power uptake 0.49 kW
Rated power 0.25 kW
Rated current 0.85 A
Start current 3.1 A

Cable

10m NSSHÖU 4Cx1,5mm²

Motor Protection

Circle thermal protector
(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device
Primary seal
Silicon carbide on ceramic
Secondary seal
Ceramic on carbon

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller	PPO-GF20
Pump casing	ABS-GF20
Motor Frame	SUS304 (EN-X5CrNi18-10)
Shaft	SUS304 (EN-X5CrNi18-10)

Discharge size

50mm screwed-in mating flange


Weight

6.7 kg (dry weight of the pump only without cable)

Performance curve


50PUA2.25-53

Discharge port	2"
Head	6.6 m
Flow	12.7 m³/h
Rated power	0.25 kW
Power input	0.49 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	0.85 A
Starting current	3.10 A
Number of poles	2
Speed	2827 1/min
Starting mode	Direct starting
Insulation class	E

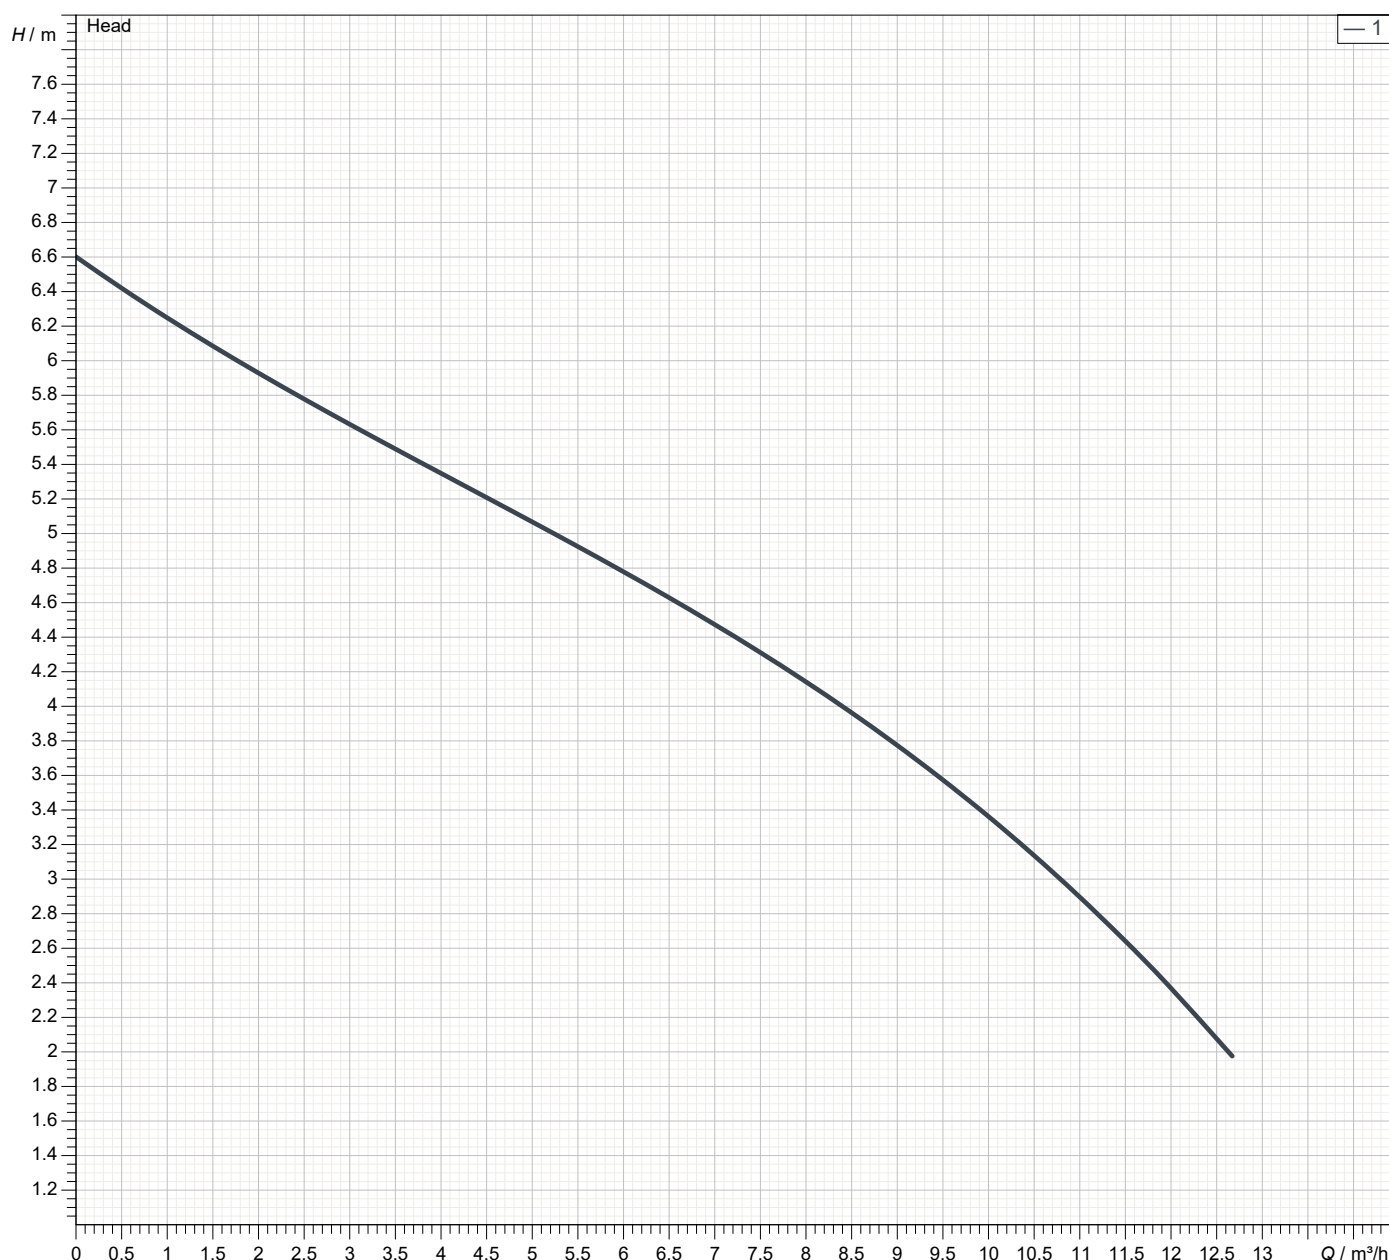

Dimensions

50PUA2.25-53

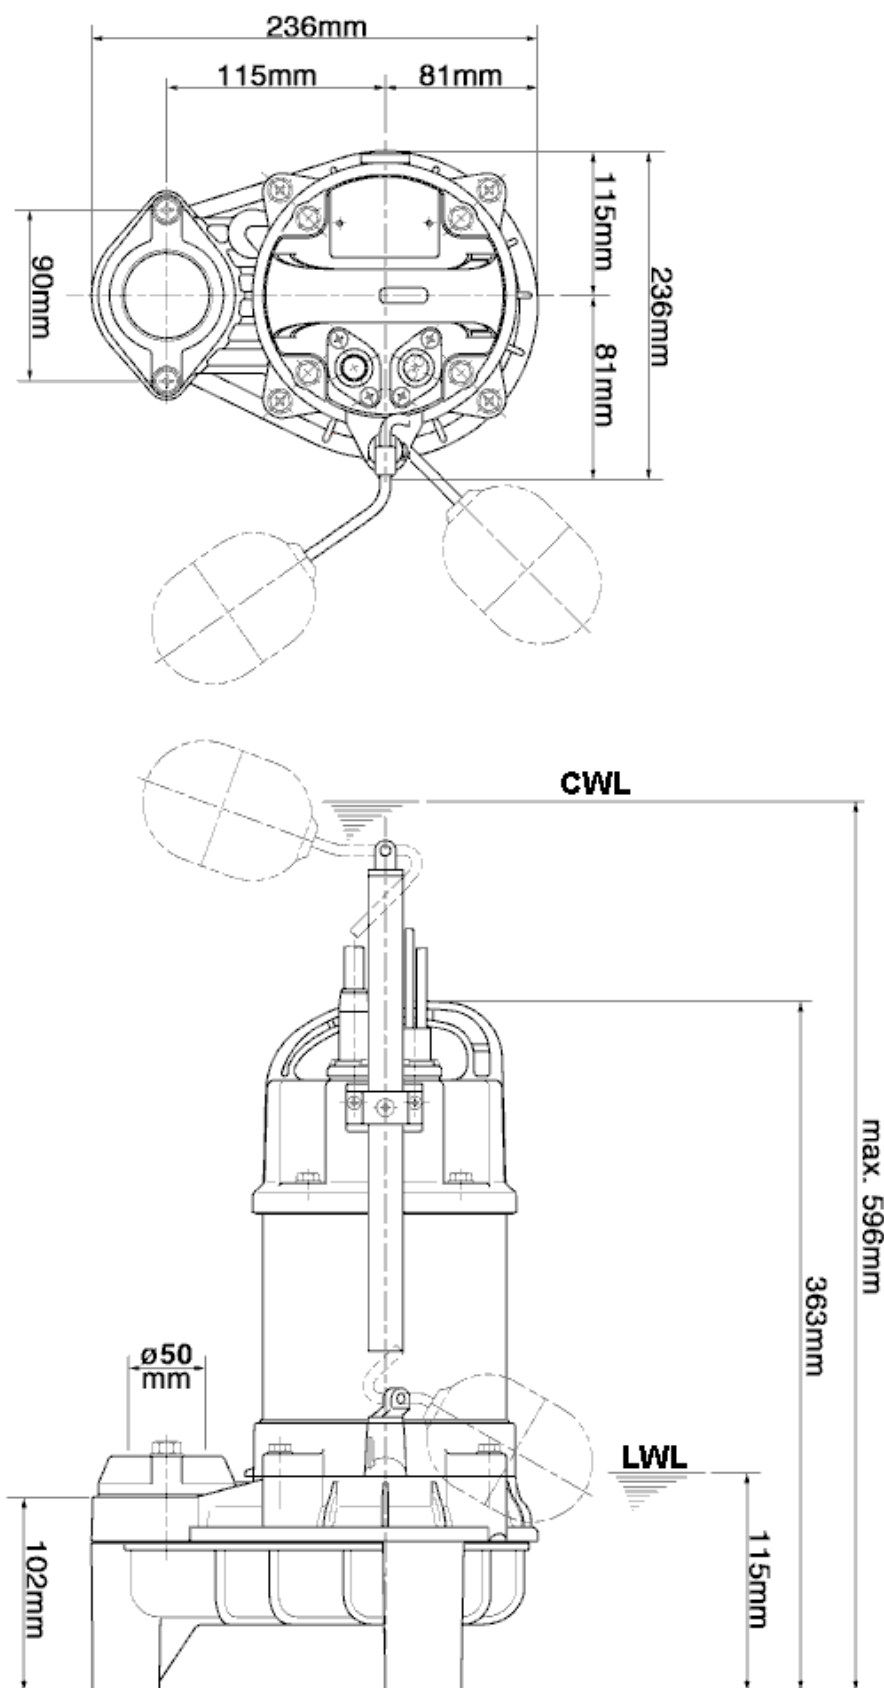

50PUA2.25-53

CWL: Continuous running water level
LWL: Lowest running water level



Tsurumi (Europe) GmbH

2024-02-07

V.01.02.2023

Wahlerstr. 10 * 40472 Düsseldorf * Germany

Tel.: +49-211-4179373


Fax: +49-211-417937-480

sales@tsurumi.eu

www.tsurumi.eu

Sectional drawing

50PUA2.25-53

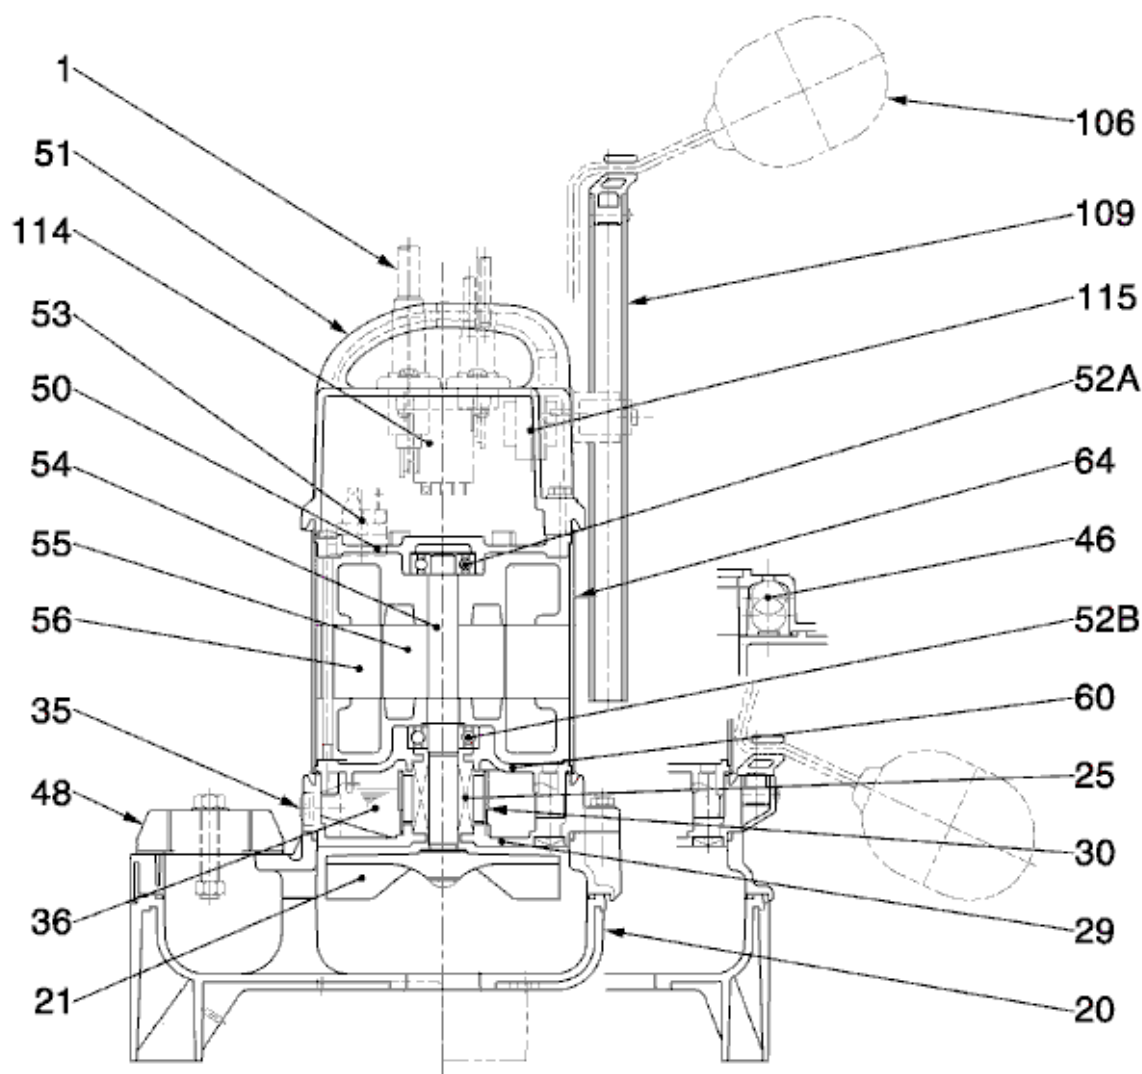

50PUA2.25-53

No.	Description	Remark	No.	Description	Remark
1	Cable	H07RN-F	55	Rotor	.
20	Pump casing	ABS-GF20	56	Stator	.
21	Impeller	PPO-GF20	60	Bearing Housing	Aluminium die casting
25	Mechanical seal	W-14HL	64	Motor Frame	SUS304 (EN-X5CrNi18-10)
29	Oil casing	PPS-(GF+MD)50	106	Float switch (2x)	ABS
30	Oil distributor	Plastic	109	Support	PVC
35	Oil screw	SUS304 (EN-X5CrNi18-10)	114	Relais	.
36	Lubricant	white oil (ISO VG32)	115	Transformator	.
46	Air vent valve	Glass bead			
48	Screwed Flange	PC(PBT-GF30)			
50	Motor cover	Steel plate			
51	Main cover	PPS-GF40			
52A	Upper bearing	6201ZZC3			
52B	Lower bearing	6202ZZC3			
53	Motor Protector 380/400/415V-50Hz	KA314-HRXL00 (H.C)			
54	Shaft	SUS304 (EN-X5CrNi18-10)			