



Data sheet 80PU21.5-52

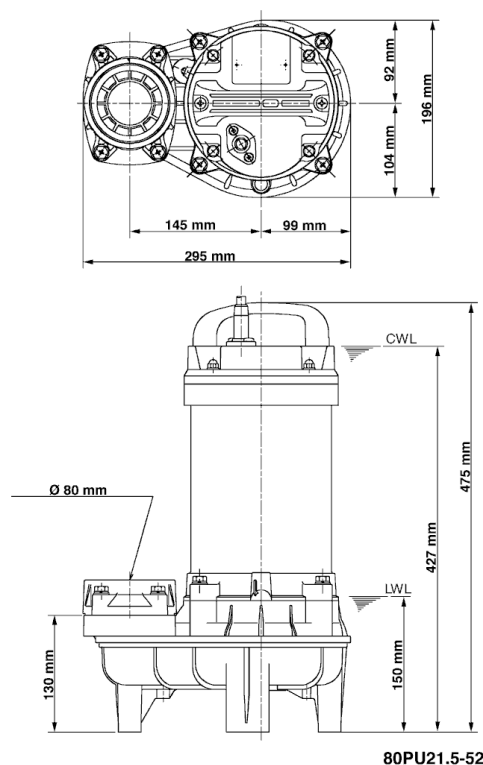

CWL: Continuous running water level
LWL: Lowest running water level

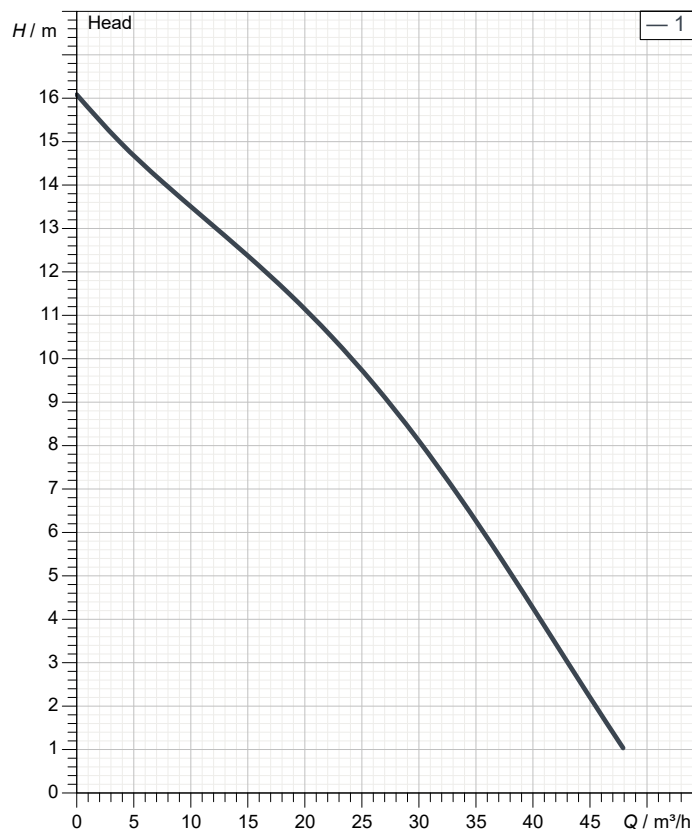

Specification

Electric submersible pump PU-series
Degree of protection IP 68
Pressure resistance max. 15 m
Type of impeller Vortex impeller
Free passage 46 mm
Suitable for:
sewage water, waste water, various waste water

Electric motor

Dry-type submersible induction motor
Insulation class E 2Poles 2885 1/min
Starting mode Direct starting
Rated voltage 400 V 50 Hz 3~
Power uptake 2.27 kW
Rated power 1.50 kW
Rated current 4 A
Start current 25.0 A

Cable

10m NSSHÖU 4Cx1,5mm²

Motor Protection

Circle thermal protector
(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device
Primary seal
Silicon carbide on ceramic
Secondary seal
Ceramic on carbon

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller	PPO-GF20
Pump casing	ABS-GF20
Motor Frame	SUS304 (EN-X5CrNi18-10)
Shaft	SUS304 (EN-X5CrNi18-10)

Discharge size

80mm screwed-in mating flange

Weight

15.8 kg (dry weight of the pump only without cable)

Performance curve



80PU21.5-52

Discharge port	3"
Head	16.1 m
Flow	47.9 m³/h
Rated power	1.50 kW
Power input	2.27 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	4 A
Starting current	25.00 A
Number of poles	2
Speed	2885 1/min
Starting mode	Direct starting
Insulation class	E



Dimensions

80PU21.5-52

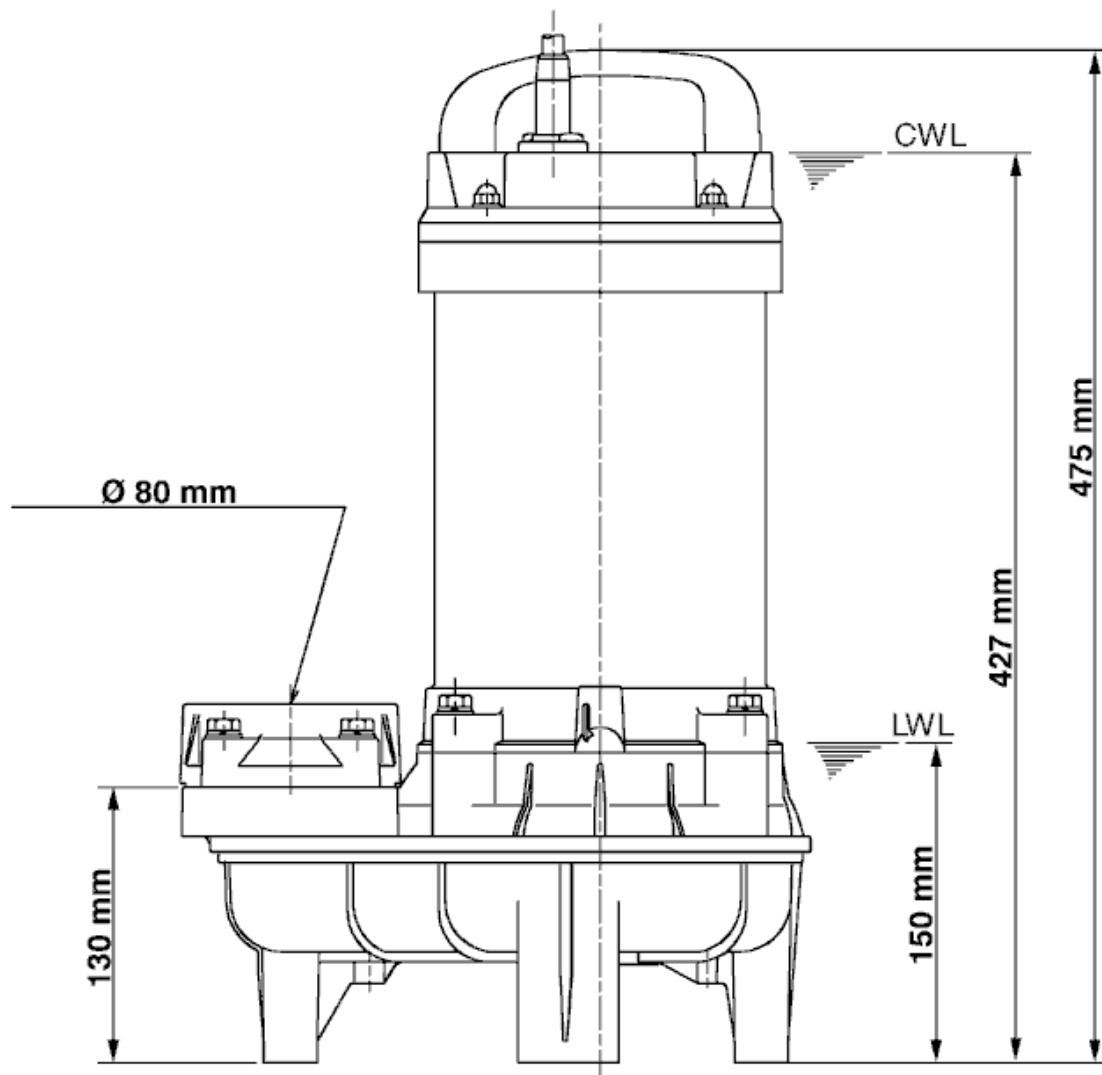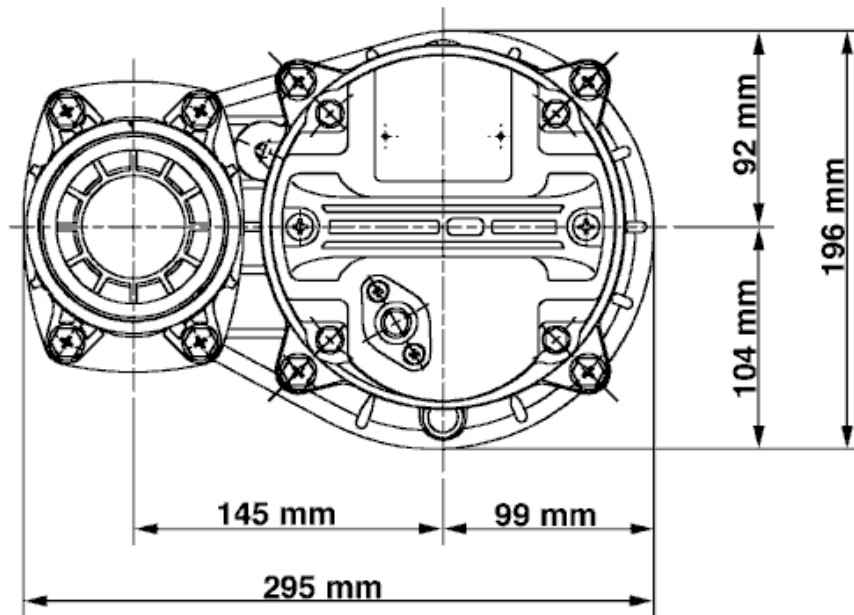


80PU21.5-52

CWL: Continuous running water level
LWL: Lowest running water level

Sectional drawing

80PU21.5-52

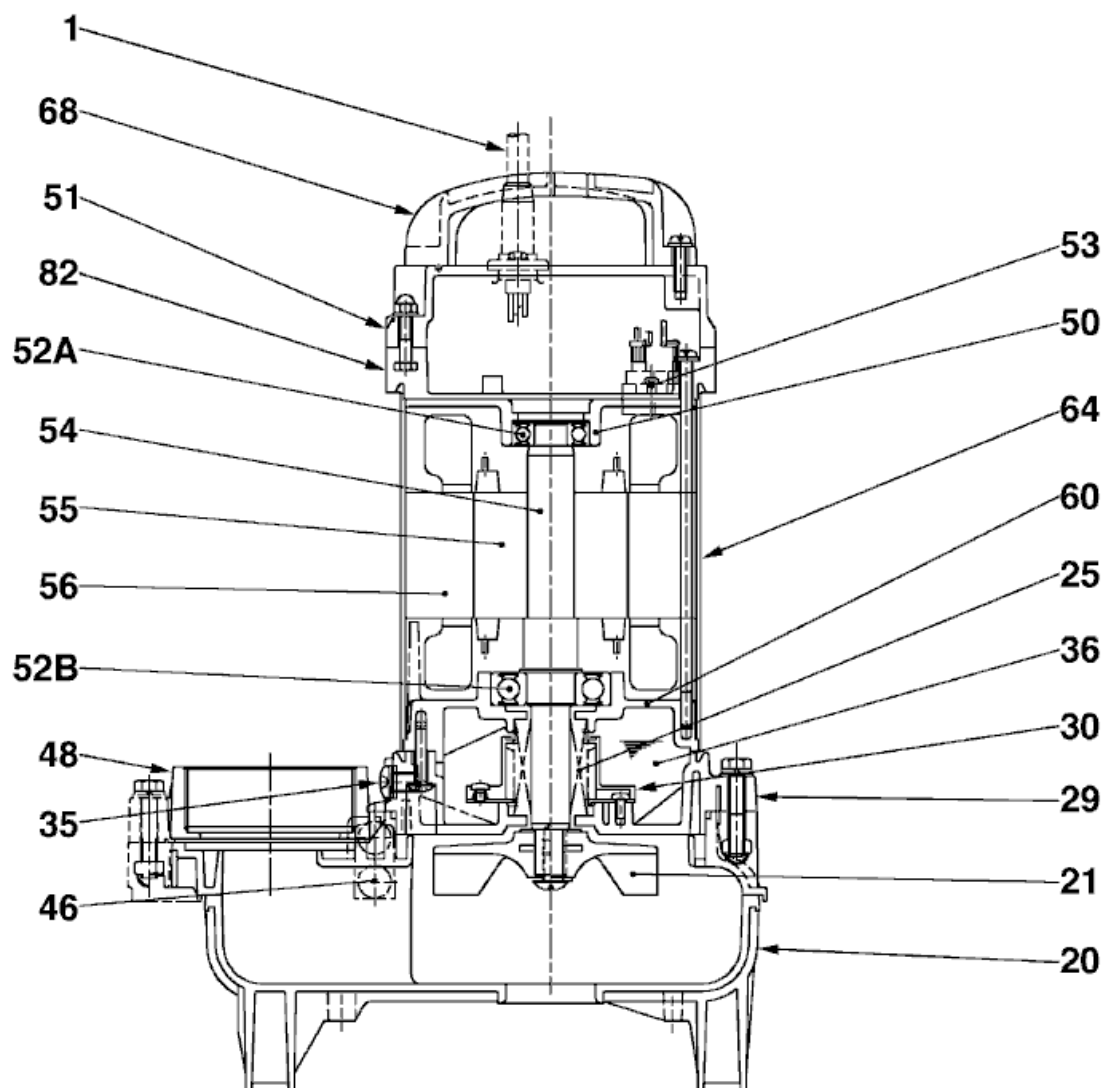

80PU21.5-52

No.	Description	Remark	No.	Description	Remark
1	Cable	H07RN-F	55	Rotor	.
20	Pump casing	ABS-GF20	56	Stator	.
21	Impeller	PPO-GF20	60	Bearing Housing	Aluminium alloy casting
25	Mechanical seal	H-20A	64	Motor Frame	SUS304 (EN-X5CrNi18-10)
29	Oil casing	PPS-(GF+MD)50	68	Handle	Plastic
30	Oil distributor	Plastic	82	Intermediate cover	Kunststoff mit GF
35	Oil screw	SUS304 (EN-X5CrNi18-10)	85	Relais	.
36	Lubricant	white oil (ISO VG32)	106	Float switch (2x)	ABS
46	Air vent valve	Glass bead	109	Support	PVC
48	Screwed Flange	PC(PBT-GF30)			
50	Motor cover	Aluminium alloy casting			
51	Main cover	PPS-GF40			
52A	Upper bearing	6203ZZC3			
52B	Lower bearing	6305ZZC3			
53	Motor Protector 380/400/415V-50Hz	KA314-HRXL00 (H.C)			
54	Shaft	SUS304 (EN-X5CrNi18-10)			