




Discharge bore mm	Phases	Motor output kW	Head max. m	Capacity max. l/min	Max. solid handling ø mm	PH value
6" BSPT	3	9,0	22,0	3250	30	5.0-9.0

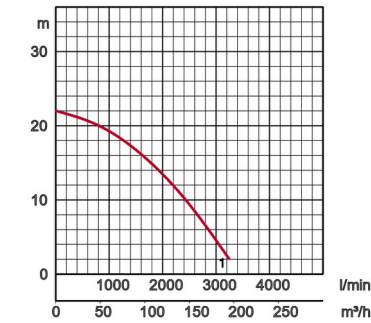

GENERAL

ø Discharge bore mm	150
Discharge Connection	Threaded flange/Hose coupling

PUMP

COMPONENTS

Impeller	Open type impeller
Shaft Seal	Double mechanical seal
Bearings	Shielded ball bearings

MATERIAL

Impeller	Chromium iron casting
Casing	Grey iron casting EN-GJL-200
Suction Plate	Chromium iron casting
Shaft Seal	Silicon carbide in oil bath

PUMPING FLUID


Type of Fluid	Sludge, Slurry, Liquids containing sandy mud and/or bentonite
Temperature	0-40°C

MOTOR

Type, Poles	Induction motor, 4 poles, IP68
Insulation	Insulation class B
Phase / Voltage	3-phase / 400V / 50Hz / d.o.l.
Motor Protector (built-in)	Circle thermal cut-out
Lubrication	Turbine oil (ISO VG32)

MATERIAL

Casing	Grey iron casting EN-GJL-150
Shaft	Stainless steel EN-X30Cr13
Cable	Rubber, NSSHÖU

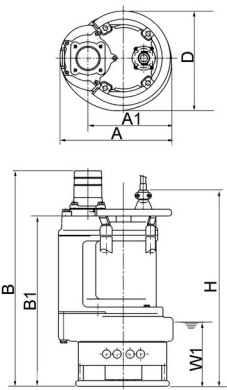

KRD611 (KRS2-150)

Model	A	A1	B	B1	D	H	W1
KRD611 (KRS2-150)	436	324	961	718	407	913	270

In the event of abrasive and corrosive utilization, stronger wear and tear will take place naturally in certain components. In this regard, please pay attention to our website www.tsurumi.eu/english/applications.htm.